

# Murmur Collection

DESIGNED IN 2022

ASSEMBLY NOTES | REV 03



NEED A HAND?

Contact us at [service@bludot.com](mailto:service@bludot.com) or  
**844.425.8368** for assistance.

@BLUDOT


We design all our pieces in our Minneapolis studio. Follow  
along on Instagram for some sneak peeks into the process.

# Parts & Hardware



QTY 8

Pt. 1682



QTY 8

Pt. 3002



QTY 1

Pt. 9026



QTY 1

Pt. 9028



QTY 4

Pt. 5014




QTY 2

Pt. 5018



QTY 2

Pt. 5019



QTY 4\*

Pt. 8041




QTY 4\*

Pt. 1217



QTY 4\*

Pt. 1218



QTY 2\*

Pt. 8042




QTY 2

Leg



QTY 1

Stretcher

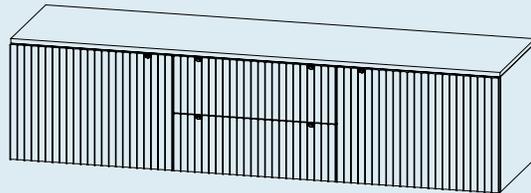

QTY 1

Case



\*Smaller cases will include lesser quantities of tip-kit hardware.  
 \*\*Nightstand comes fully assembled and will only include tip-kit hardware.

# Step 01

ATTACH LEGS AND STRETCHER.

**NOTE:** Nightstand comes with legs pre-attached, skip to Page 4.


1. Install PT. 5018 and PT. 5014 into the pre-drilled holes in legs.
2. Install PT. 5019 into the pre-drilled holes in the stretcher.
3. Align the arrow on PT. 5019 towards PT.5018.

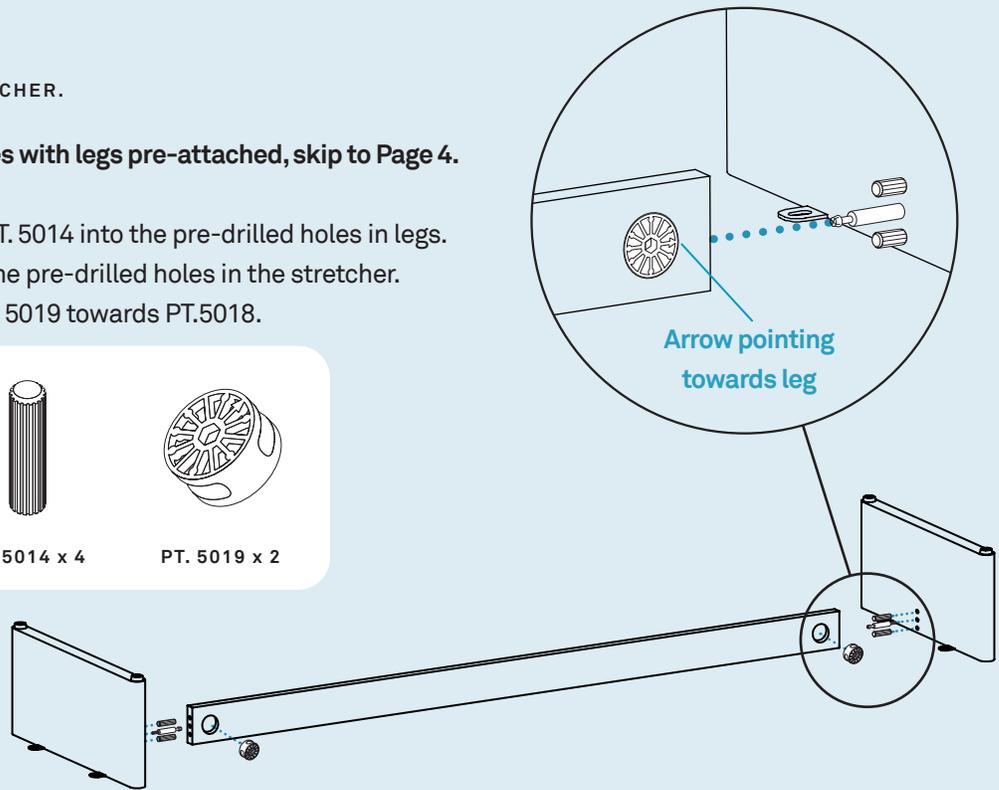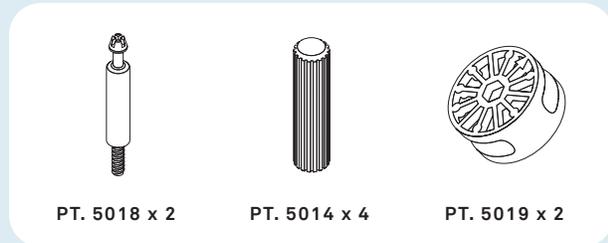

# Step 02

SECURE LEGS AND STRETCHER.

1. Push legs into place.
2. Turn PT. 5019 one half turn, 180°, clockwise as shown.

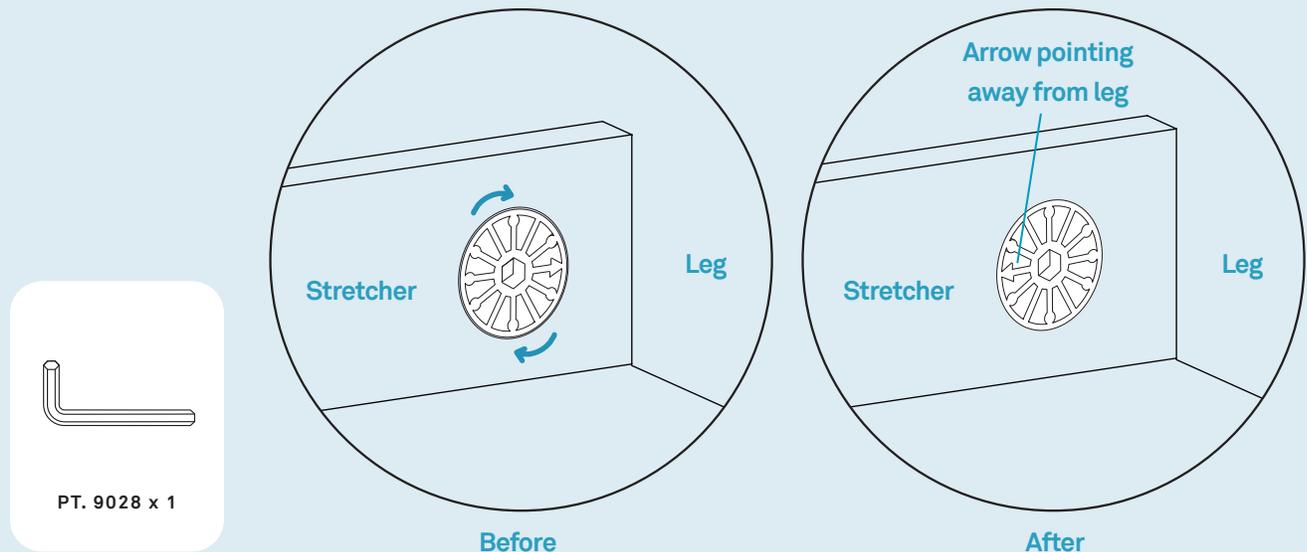


## Step 03


### ATTACH BASE TO CASE.

This product is heavy. Grab a buddy or two when performing this next step.

Attach the legs to the case case as shown using the provided hardware. Carefully lift case upright after legs are attached.

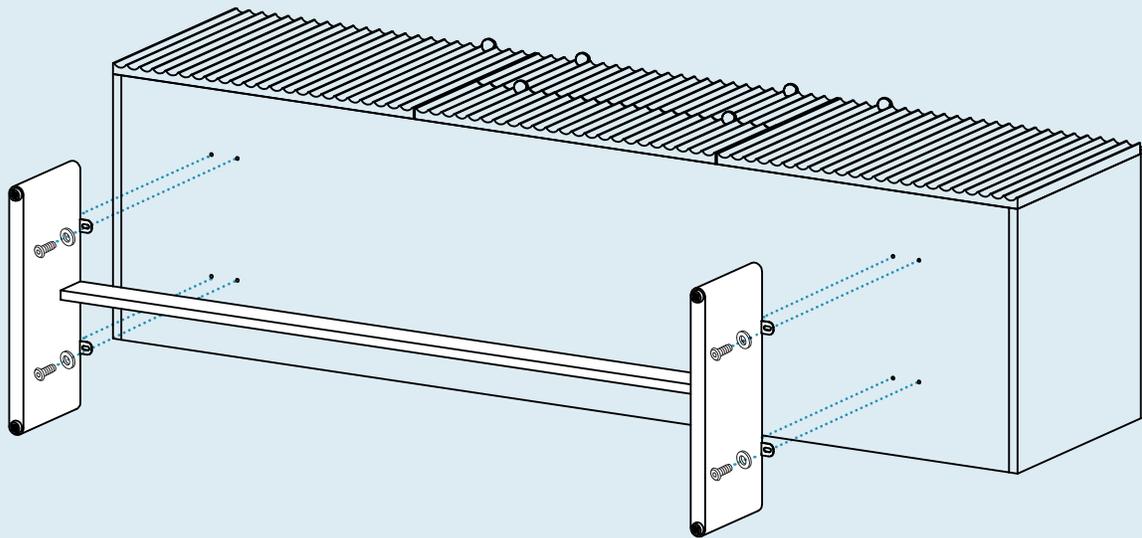

PT. 1682 x 8



PT. 3002 x 8





PT. 9026 x 1

## Step 04

INSTALL ANTI-TIP BRACKET TO CASE.

Bracket must be installed to top panel of case. In order to prevent damage, it is recommended that 3/32" pilot holes be drilled prior to installation.

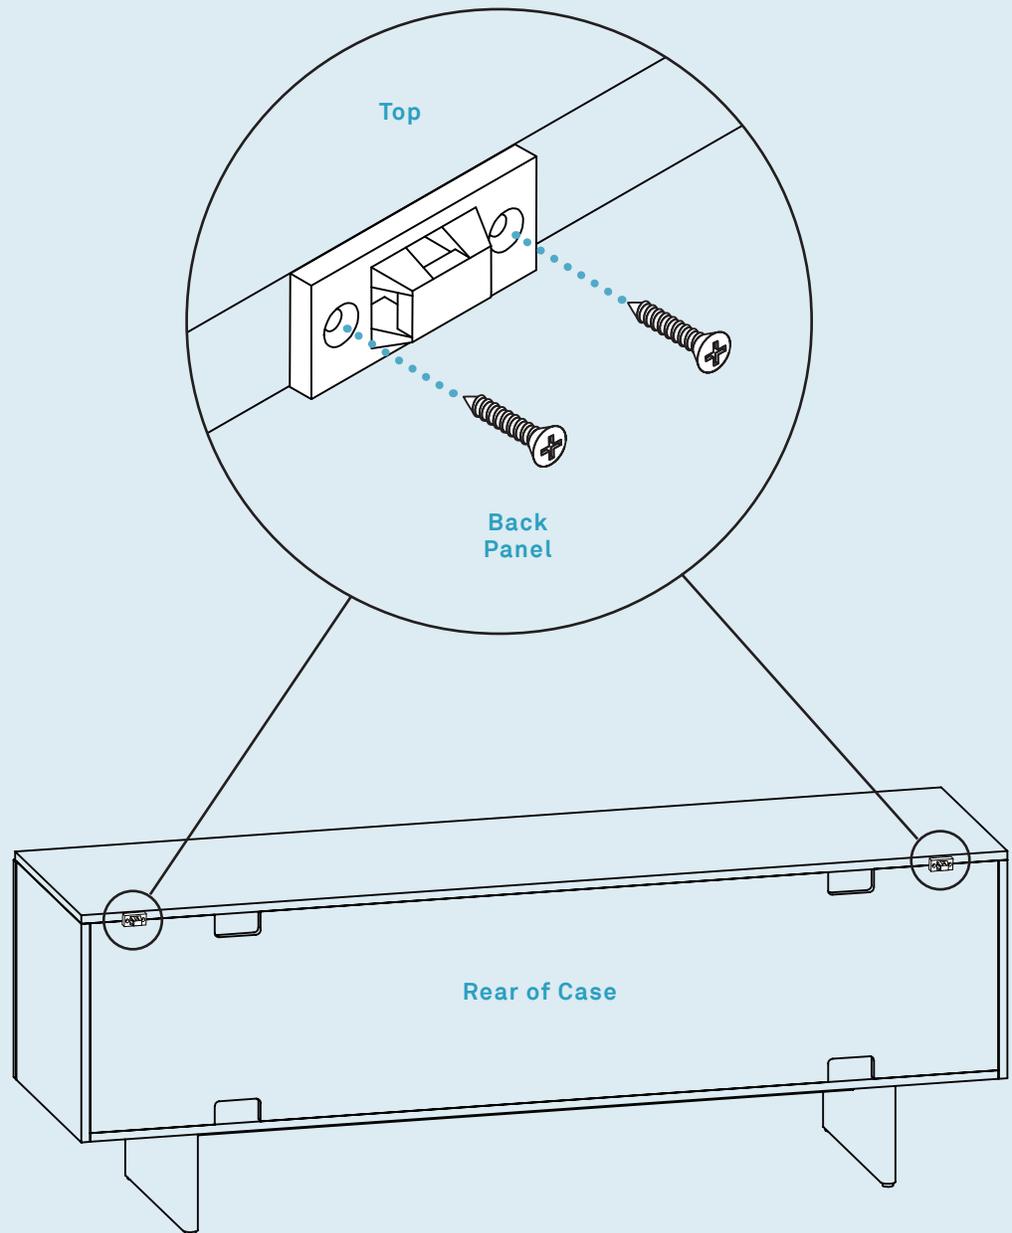

PT. 8041 x 2






PT. 1217 x 4

# Step 05

ATTACH ANTI-TIP BRACKET TO THE WALL.

Install anti-tip bracket to wall stud 1-inch below case top panel height.

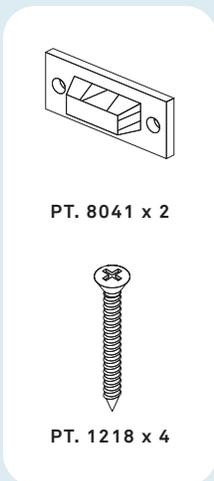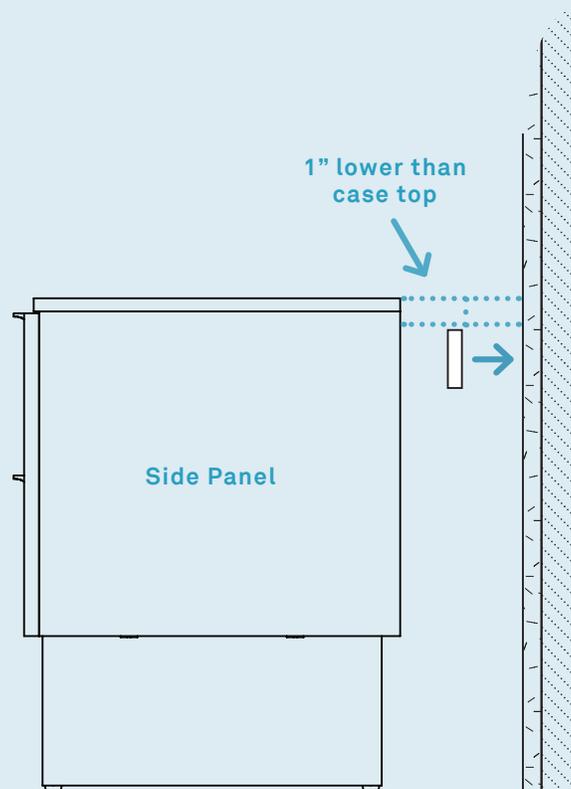
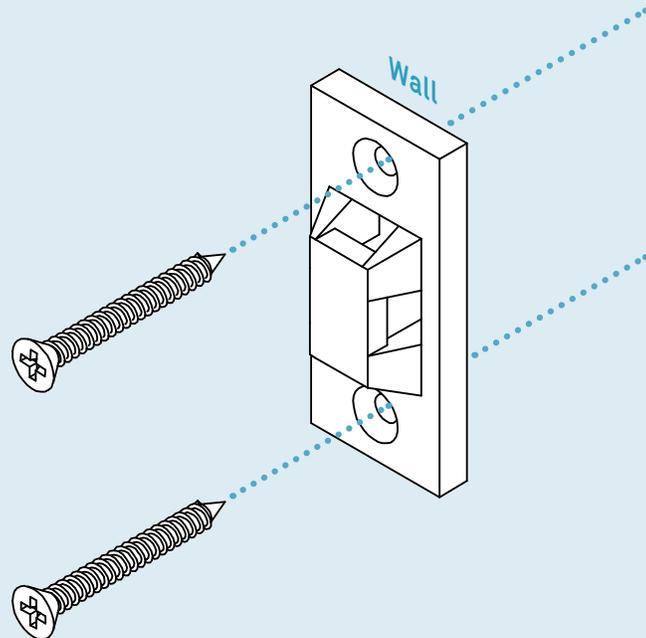


# Step 06

## SECURE THE CASE.

Install and tighten the strap prior to using the product.


Level product by fully retracting the adjustable levelers to create the lowest possible height. Then unthread the levelers as needed to make even contact with the floor.

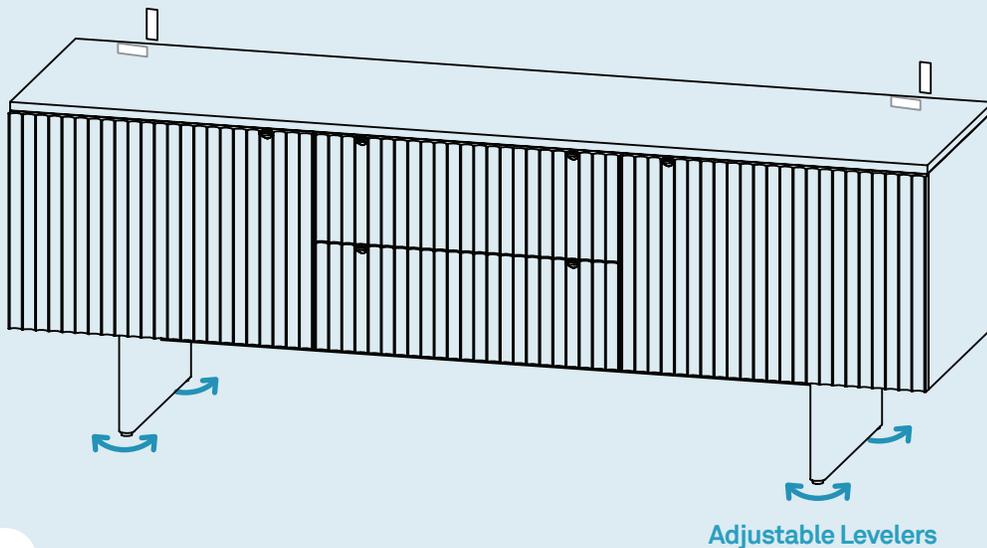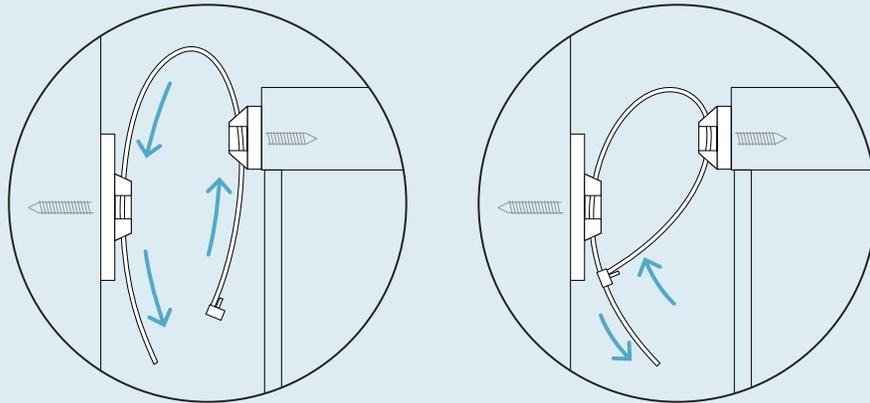

# Additional Information

## DOOR ADJUSTMENT.


Hinges work in pairs. If you adjust one hinge, chances are you will have to adjust all the hinges.

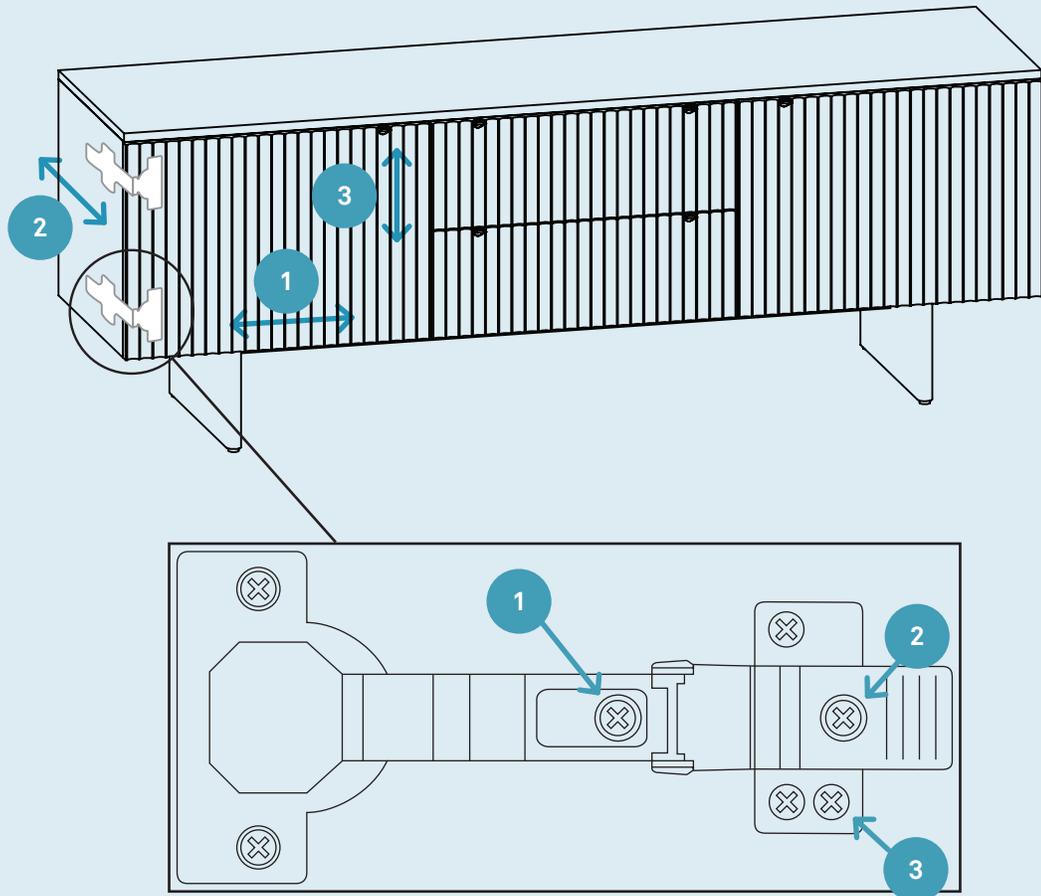

# Additional Information

## DRAWER ADJUSTMENT.

The drawer heights may be adjusted to prevent surfaces from rubbing against each other. Rotate the wheel beneath the drawer as shown to move the drawer up or down.

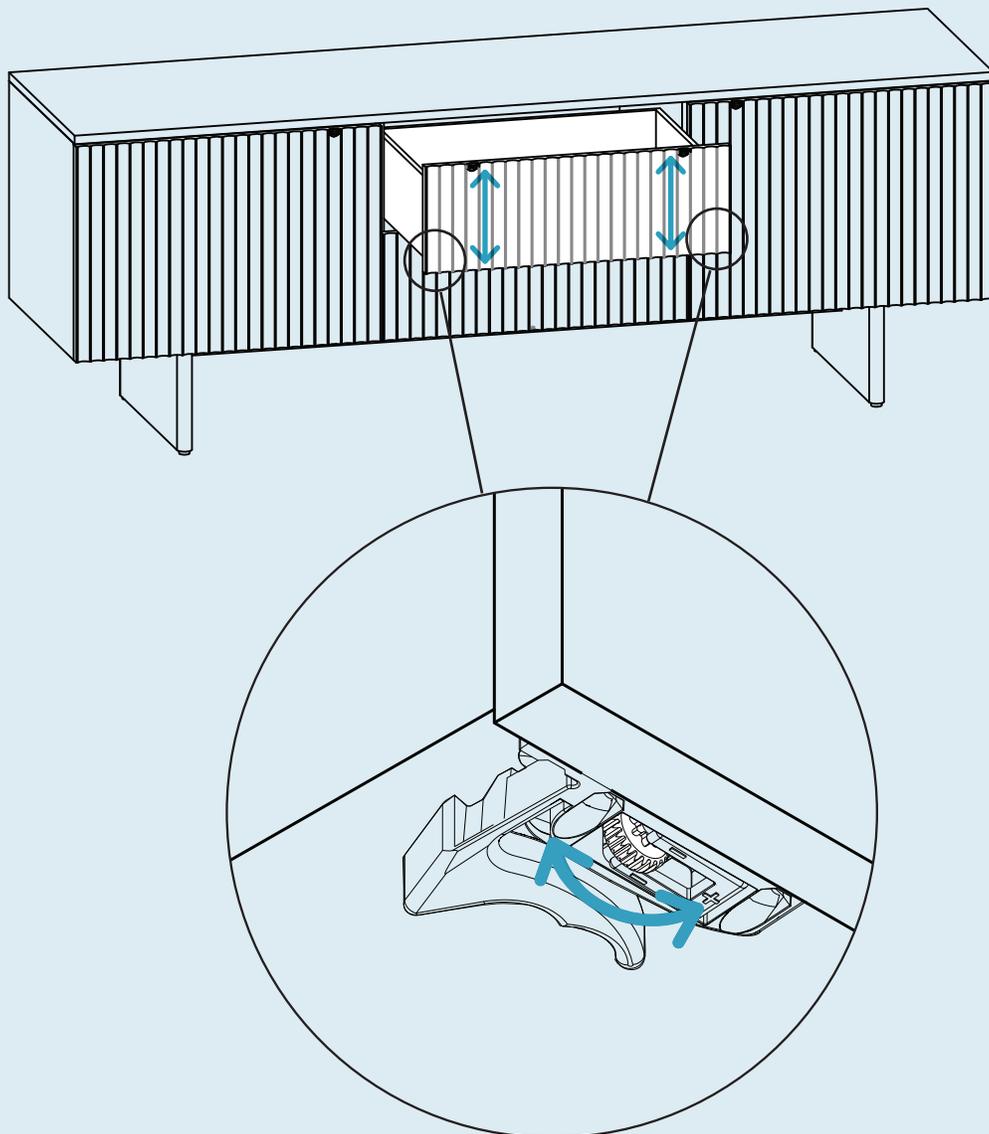


# Drawer Removal

## REMOVE DRAWERS.

Extend the drawer completely. Squeeze both locks on the underside of the drawer while pulling the drawer out and lifting upwards.

To reinstall, lower drawer front into place and push closed.

**NOTE:** The 6 Drawer Dresser comes with an interlock system and requires additional steps for drawer removal and re-installation. See page 10 for details.

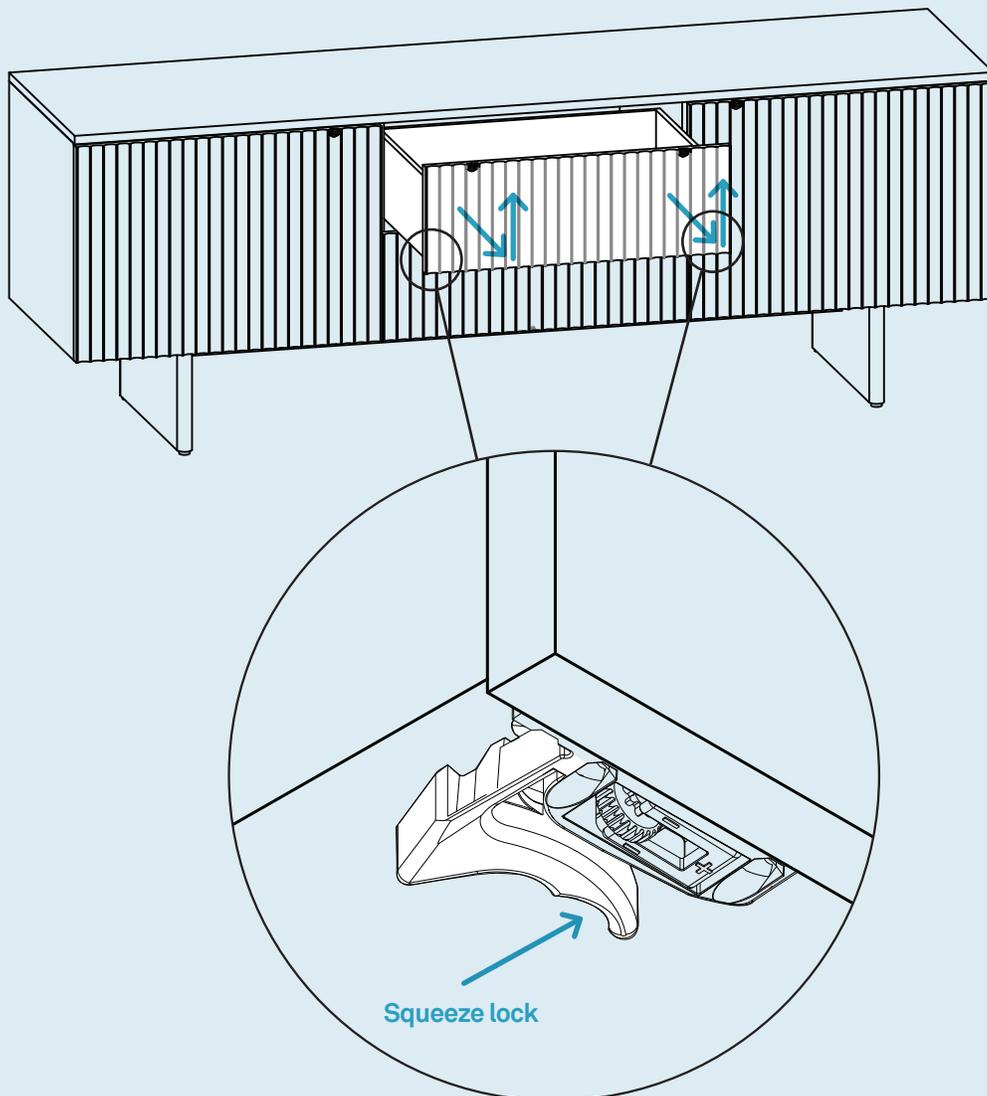

# Interlock System

## INSTRUCTIONS FOR 6 DRAWER DRESSER.

Any single drawer can be easily removed. The interlock will re-engage when the drawer is reinserted and closed. If multiple drawers need to be removed, the following procedure must be used:

1. Remove the 1st drawer.
2. Reach inside the back of the case and move the actuator to the 'CLOSED' position.
3. This will allow a 2nd drawer to be removed.
4. To remove a 3rd drawer, move the actuator to the 'CLOSED' position for the 2nd drawer.
5. Continue until all the drawers are removed.


To install the drawers, the rear actuators must be moved to the 'OPEN' position for each drawer being installed. Only 1 actuator can be moved at a time.

**CAUTION: Do not install and slam any drawer shut with the actuator in the 'CLOSED' position. This may damage the actuator or bend the latch which could cause the system to malfunction.**


To reinstall the drawers, the following procedure must be used:

1. To install the 1st drawer, reach inside the back of the case and move the corresponding actuator to the 'OPEN' position.
2. Insert the drawer and slowly close until the interlock engages.
3. To install the 2nd drawer, reach inside to the back of the case and move this actuator to the 'OPEN' position.
4. Continue the installation with each successive drawer.

CLOSED ACTUATOR

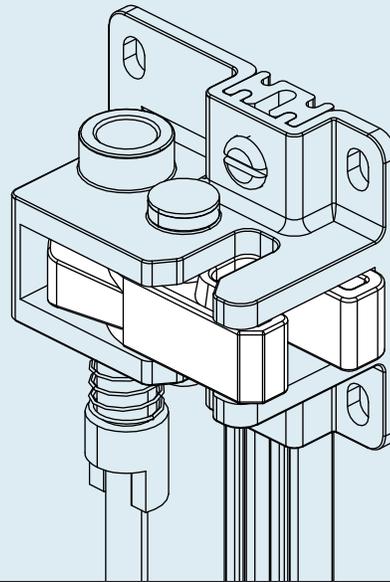

OPEN ACTUATOR

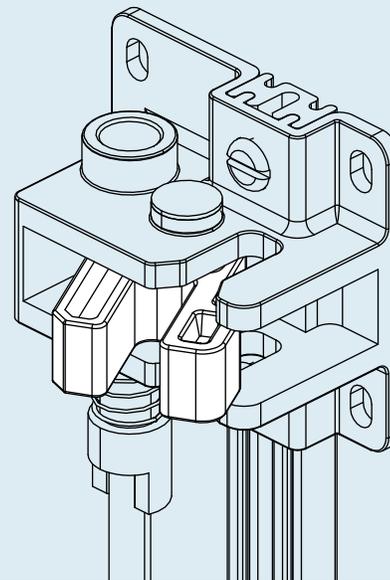

<b>⚠ WARNING</b>	
	<b>Children have died from furniture tipover.</b> <b>To reduce the risk of furniture tipover:</b> <ul style="list-style-type: none"><li>• ALWAYS install anti-tip device provided.</li><li>• NEVER put a TV on this product.</li><li>• NEVER allow children to stand, climb or hang on any drawers, doors, or shelves.</li><li>• NEVER open more than one drawer at a time.</li><li>• DO NOT defeat or remove the drawer interlock system; it is an important stability and safety system.</li><li>• Place heaviest items in the lowest drawers.</li></ul> <p><i>This is a permanent label. Do not remove!</i></p>
	

Warning applicable to 6 Drawer Dresser

## Additional Information

### CAUTION

Do not store clothing in this product unless it specifically indicated for that purpose. The items within this collection intended for clothing storage include the: 6 Drawer Dresser

### CLEAN

Clean with a slightly damp, soft cloth. To remove dirt and fingerprints, use quality cleaners formulated for wood furniture. Wipe completely dry with a soft cloth in the direction of the wood grain.

### NOTE

Wood will expand and contract as seasonal humidity levels change. Keep humidity levels consistent to limit wood movement and prevent warping. See page 7 and 8 to adjust doors and drawers as needed.

