


Rule Collection



DESIGNED IN 2016

ASSEMBLY NOTES | REV 00

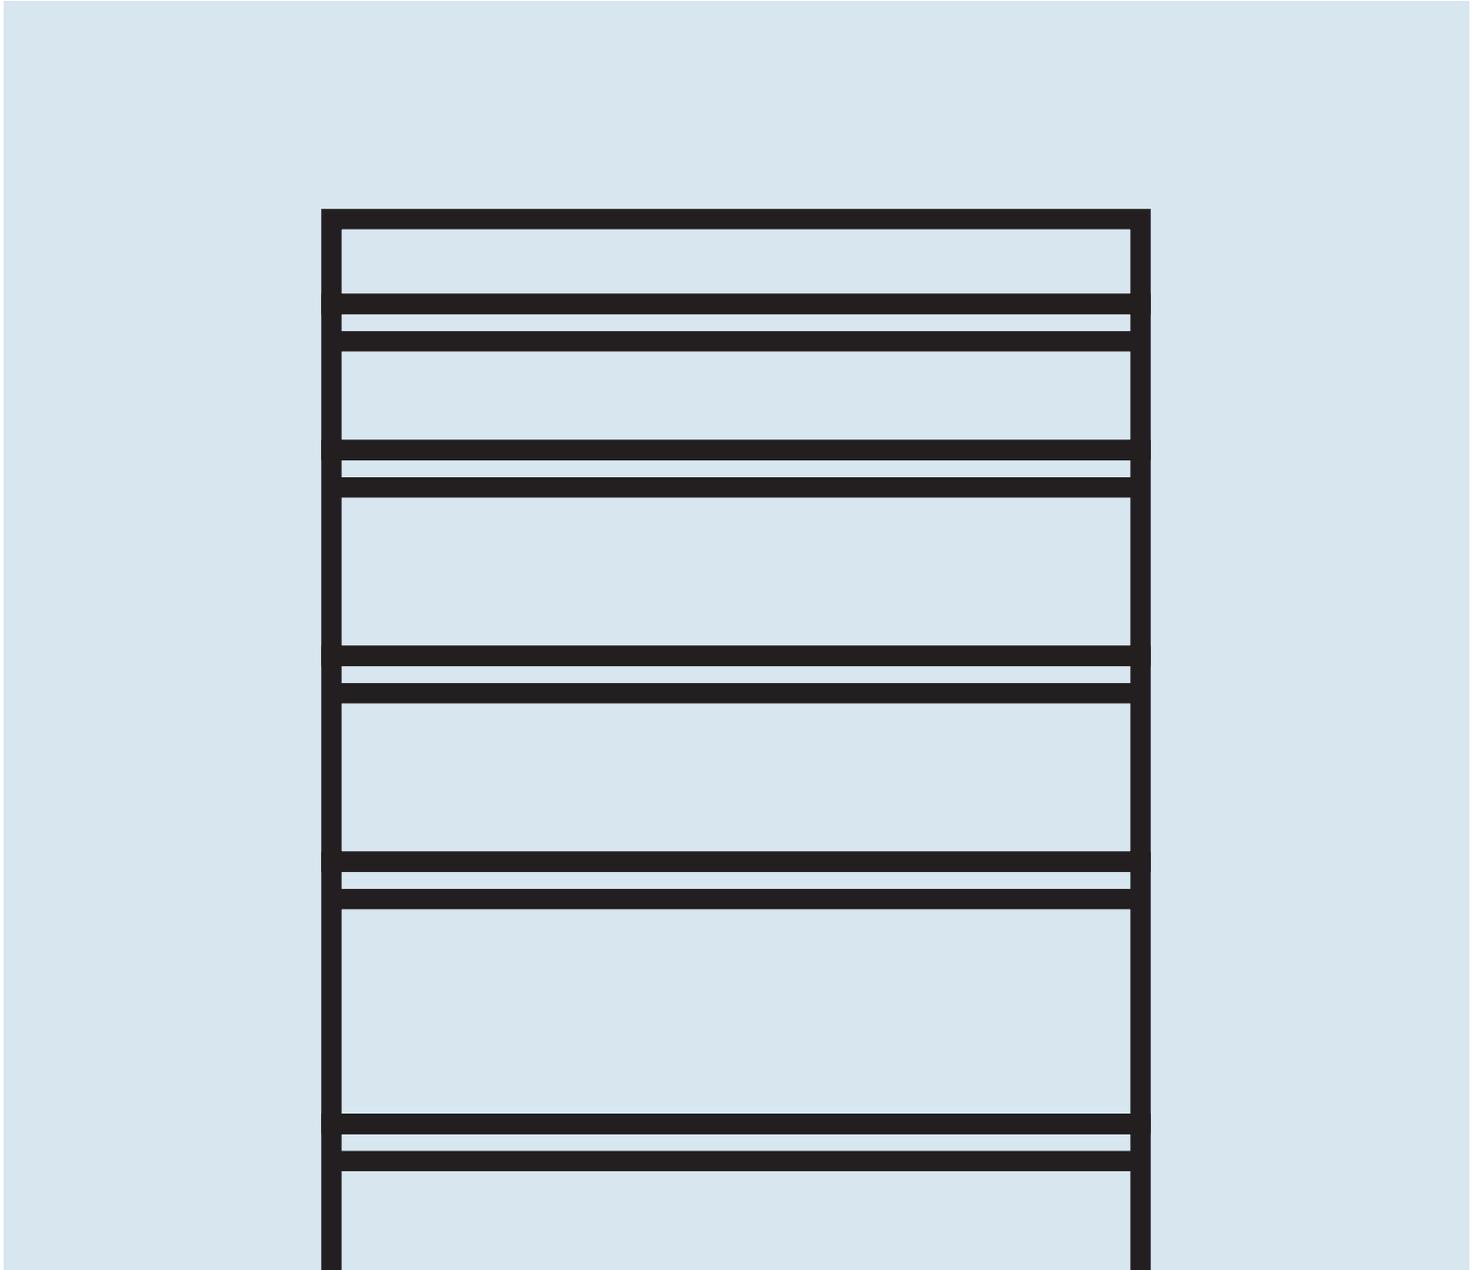


YOU FOLLOW?

Hot for geometry. Giddy for grids. The Rule collection serves up well considered planes and angles that are ready to slay clutter and get your room in formation.

NEED A HAND?


Contact us at service@bludot.com or **844.425.8368** for assistance.

Parts & Hardware



QTY 2

Pt. 8041



QTY 1

Pt. 8042




QTY 2

Pt. 1217



QTY 2

Pt. 1218

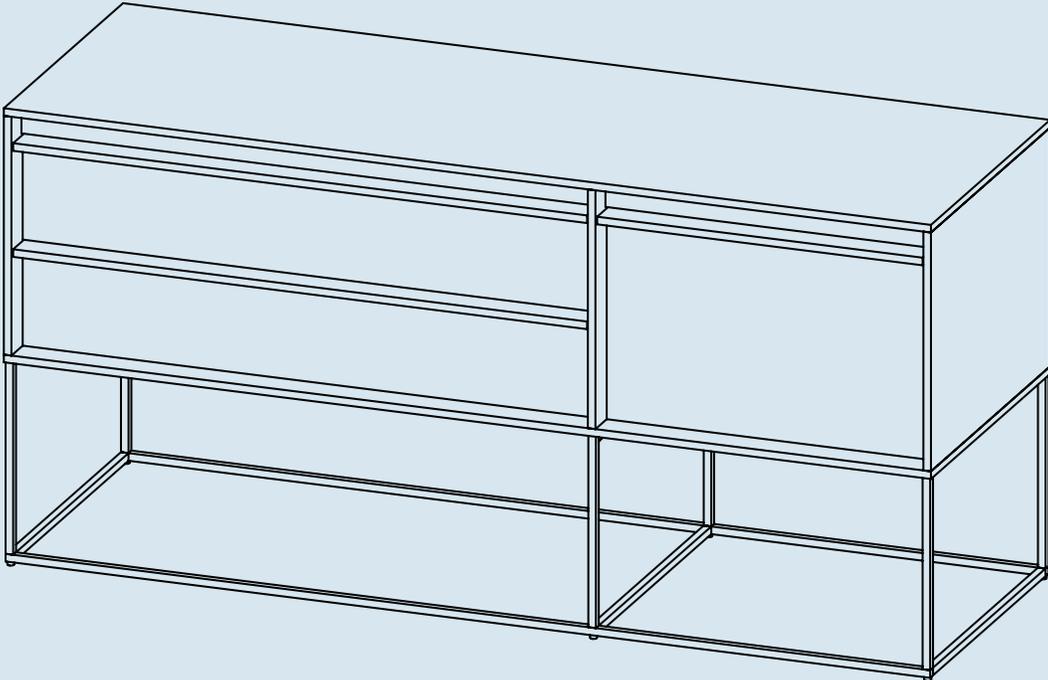


QTY 1

Case

Step 01


ATTACH ANTI-TIP BRACKET TO THE WALL.

Install anti-tip bracket to wall stud 1-inch below case top panel height.

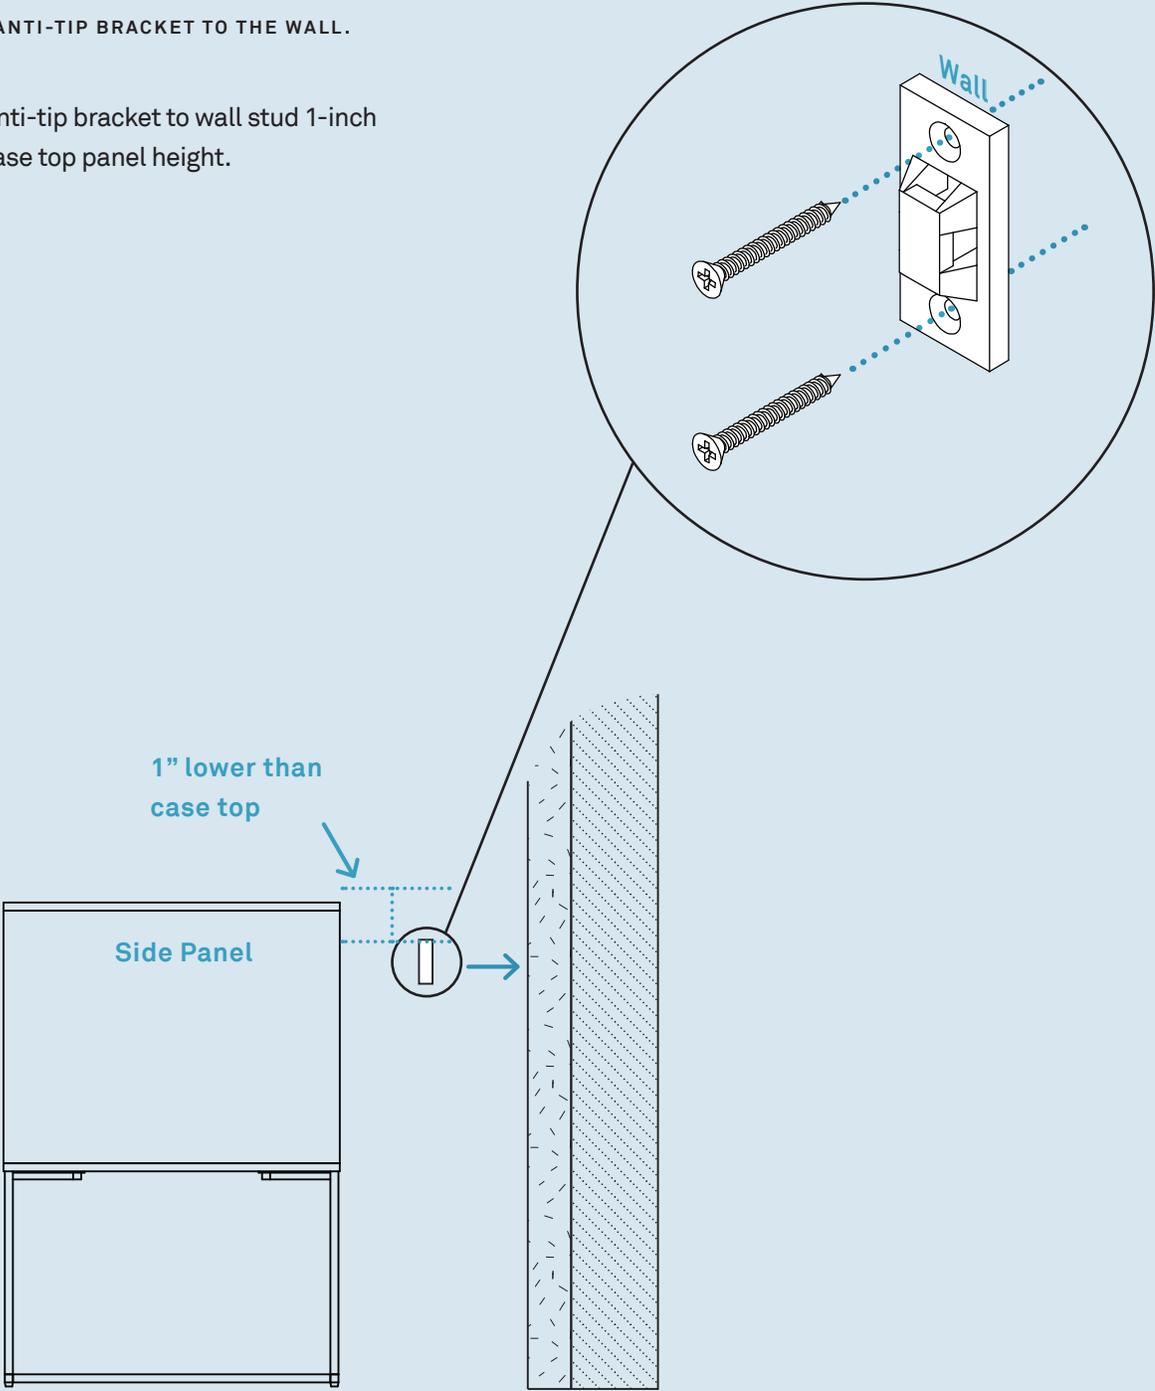

1" lower than case top

Side Panel



PT. 8041 x 1






PT. 1218 x 2

Step 02

INSTALL ANTI-TIP BRACKET TO CASE.

Bracket must be installed to top panel of case. In order to prevent damage, it is recommended that 3/32" pilot holes be drilled prior to installation.

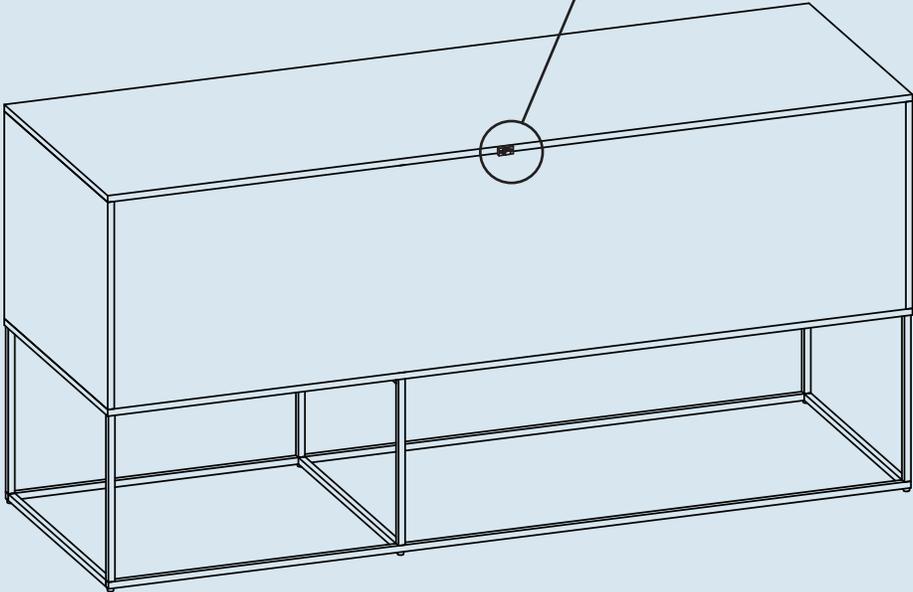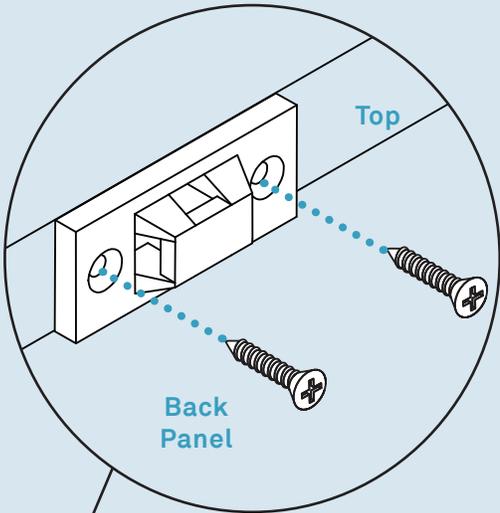

PT. 8041 x 1





PT. 1218 x 2


Step 03

SECURE THE CASE.

Install and tighten the strap prior to using the product.

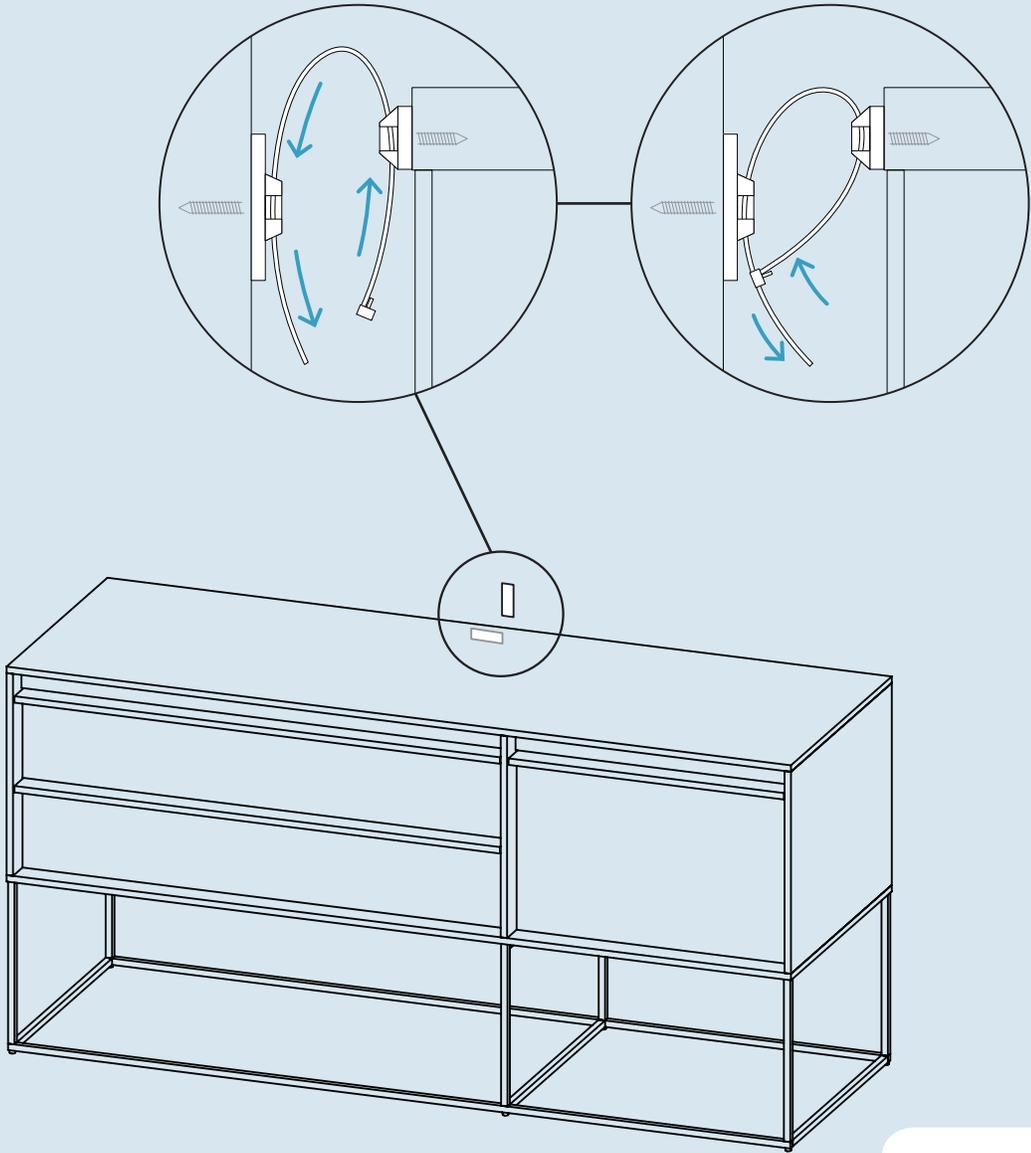


Additional Information

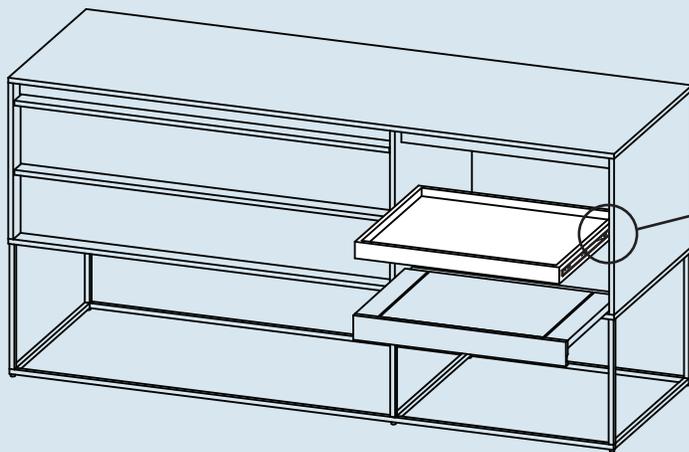

TO REMOVE THE SLIDING SHELF


Pull lever up on the right side and push down on the left side of the shelf slide. With levers engaged pull shelf out.

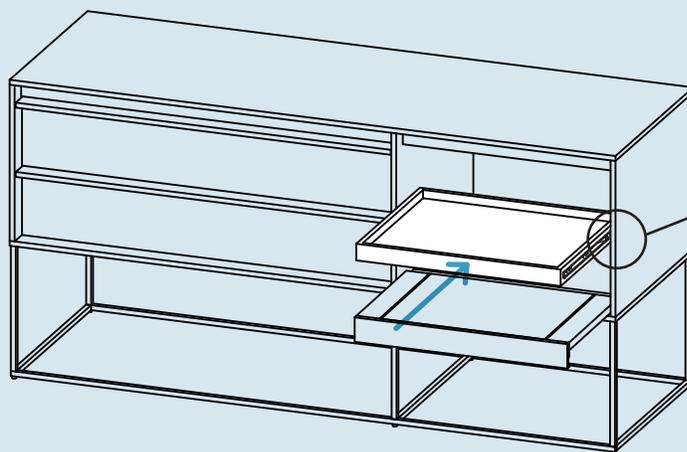

TO REINSTALL THE SLIDING SHELF


To install the sliding shelf extend drawer slides out from case, align with shelf slides as shown, and slide shelf in. Be sure to push until shelf is completely engaged.

Additional Information

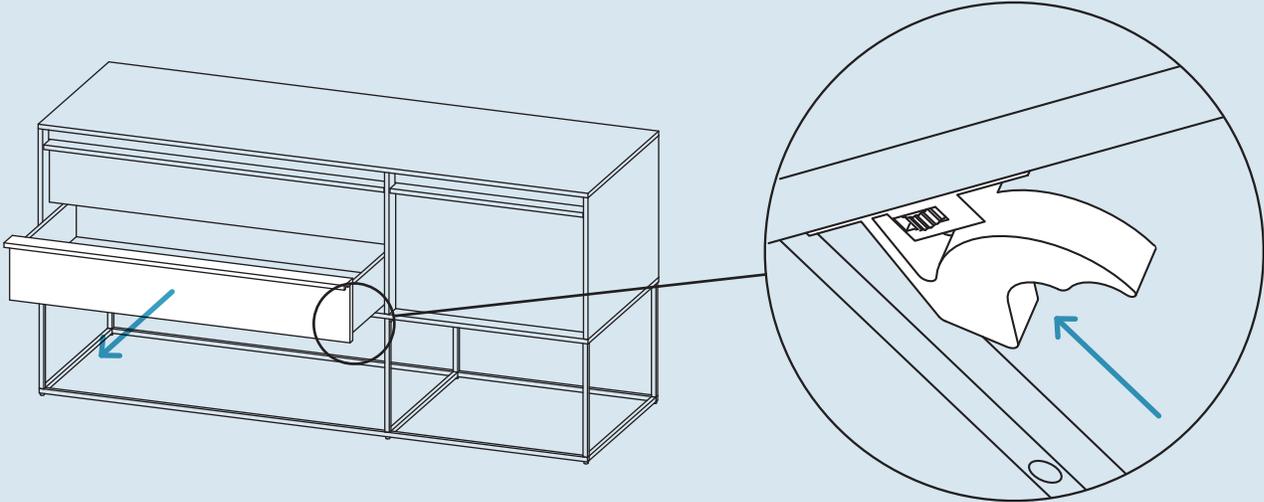

TO REMOVE DRAWERS


Extend the drawer completely. Squeeze both locks on the underside of the drawer while pulling the drawer out.

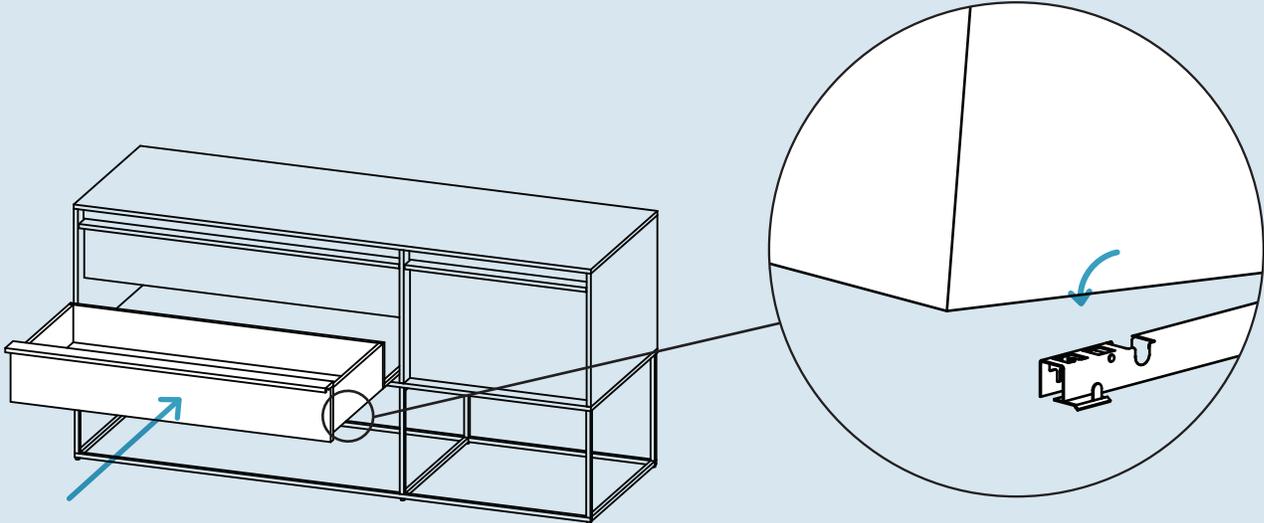

TO REINSTALL THE DRAWER


Pull both slides forward. Engage rear slide catches. Lower drawer front into place and push closed.

Additional Information

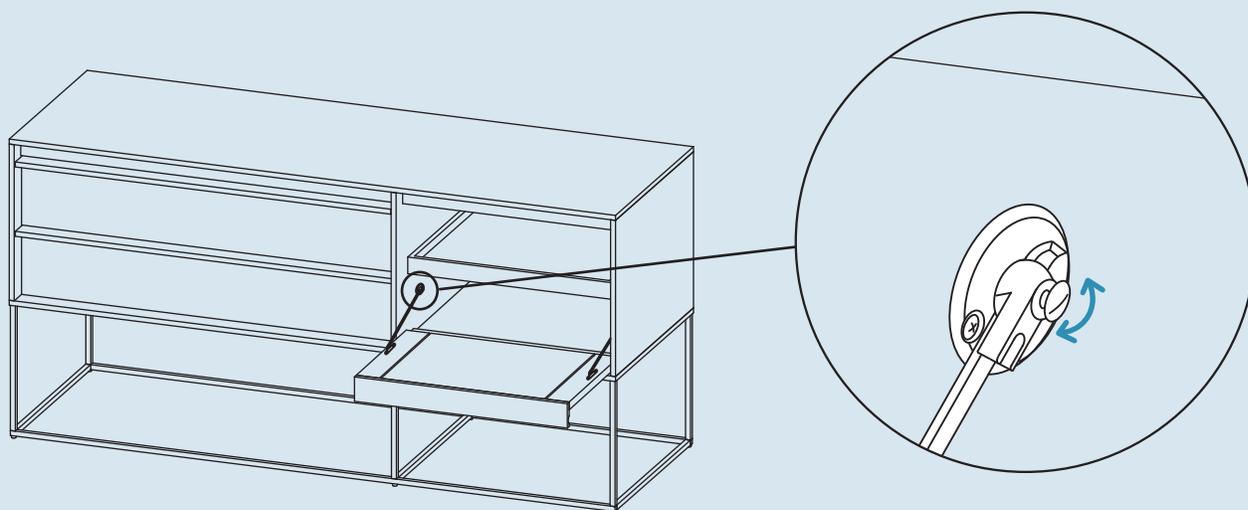

TO ADJUST LID STAYS

Open door and locate lid stay mechanisms. To reduce tension , turn adjustment screws counterclockwise. To increase tension, turn adjustment screws clockwise

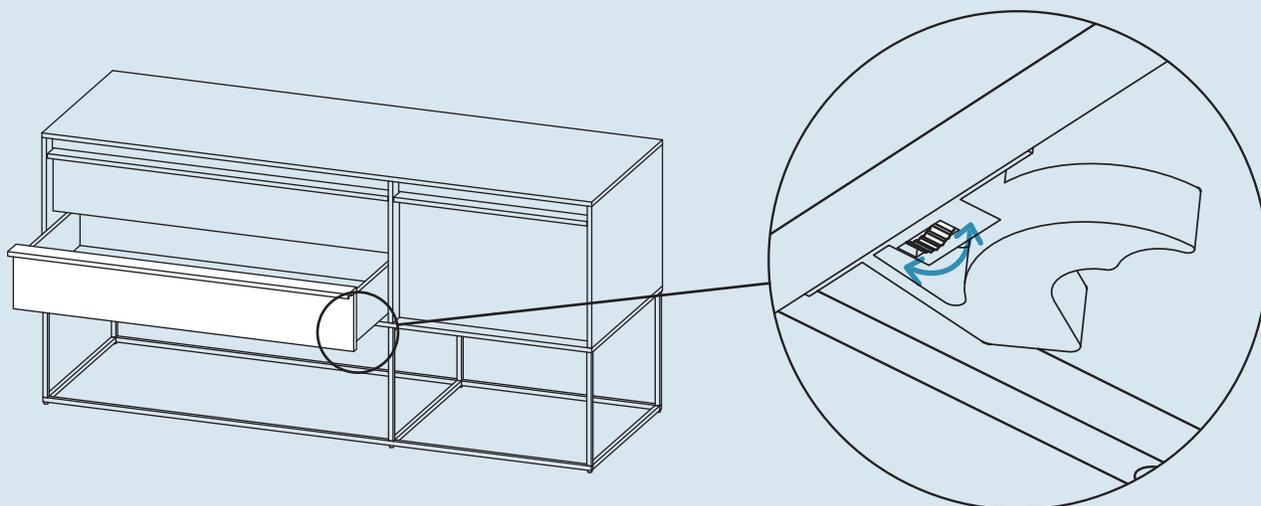

TO ADJUST DRAWER FACE

To adjust drawer face alignment pull the drawer out until the undermount release is visible. Then turn the adjustment wheels until the drawer face is properly aligned.

CLEAN

Clean with a slightly damp, soft cloth. To remove dirt and fingerprints, use a quality cleaner formulate for wood furniture. Wipe completely dry with a soft cloth in the direction of the wood grain.

