
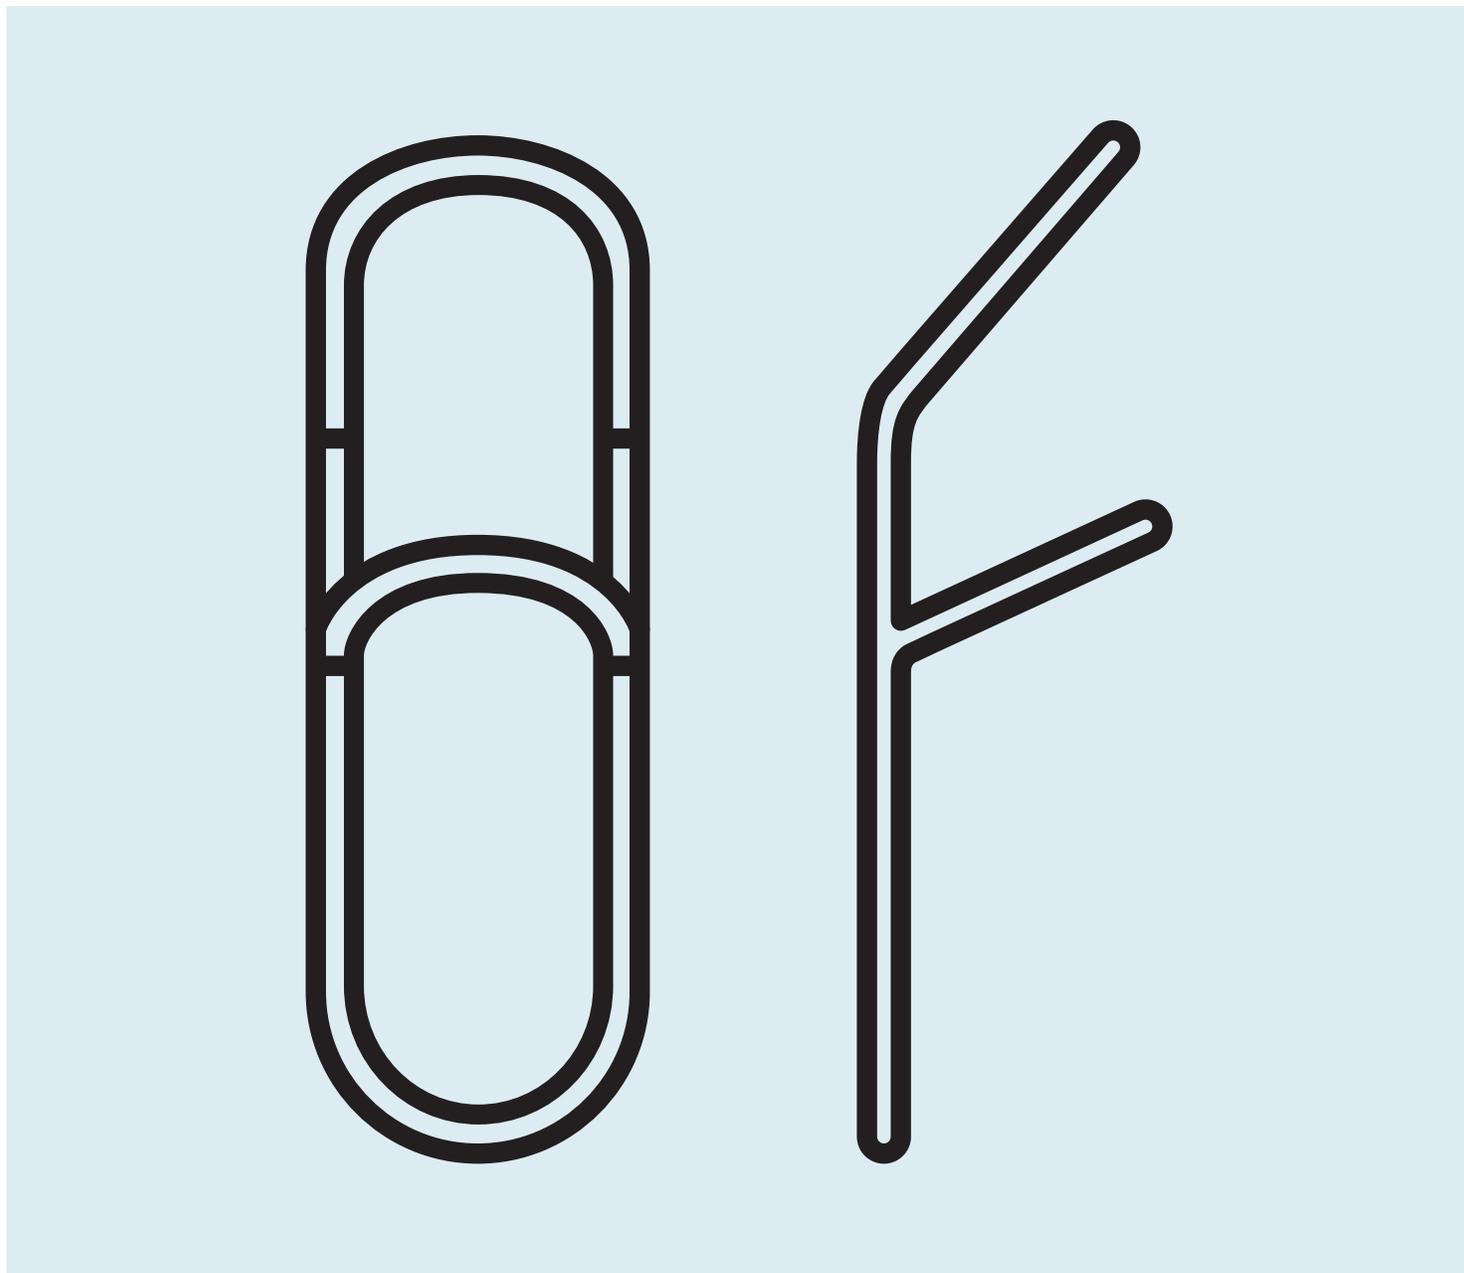


# Tack Wall Hook

DESIGNED IN 2022

ASSEMBLY NOTES | REV 00




## NEED A HAND?

Contact us at [service@bludot.com](mailto:service@bludot.com) or  
**844.425.8368** for assistance.

## @BLUDOT

We design all our pieces in our Minneapolis studio. Follow  
along on Instagram for some sneak peeks into the process.

# Parts & Hardware



QTY

3


Wall Anchor



QTY

3

Wall Screw

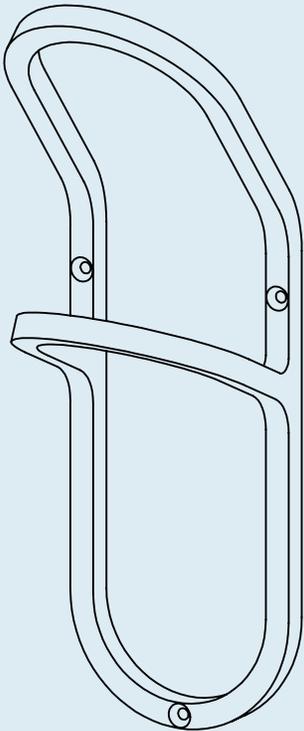

QTY

1

Wall Hook

# Step 01



## INSTALL WALL HOOK

Wall anchors and fasteners are included for installation. Please consult your local hardware professional to determine the hardware best suited for your wall type.

Position the hook in the desired location and orientation, then mark the mounting locations.

If the mounting location is not positioned on a stud, drill a **3/16"** hole in the marked location and insert wall anchor. If the mounting location is located on a stud, this step of installing an anchor may be skipped. Instead, drill a **3/32"** pilot hole in the marked position.

Attach wall hook using provided wall screw to complete installation.

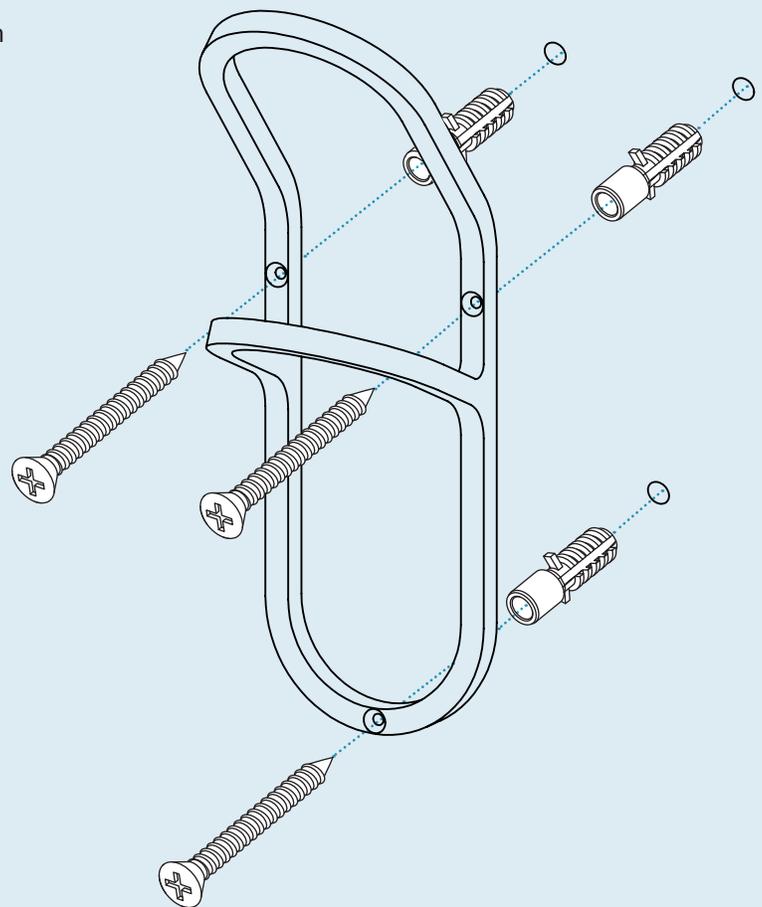

Wall Anchor x 3



Wall Screw x 3

## Additional Information

### NOTE

30 lbs maximum weight capacity on hook.

### CLEAN

Clean with a slightly damp, soft cloth. To remove dirt and fingerprints, use a quality cleaner formulated for painted metal furniture. Wipe completely dry with a soft cloth.

