


Wook Wall Hook



DESIGNED IN 2014

ASSEMBLY NOTES | REV 00

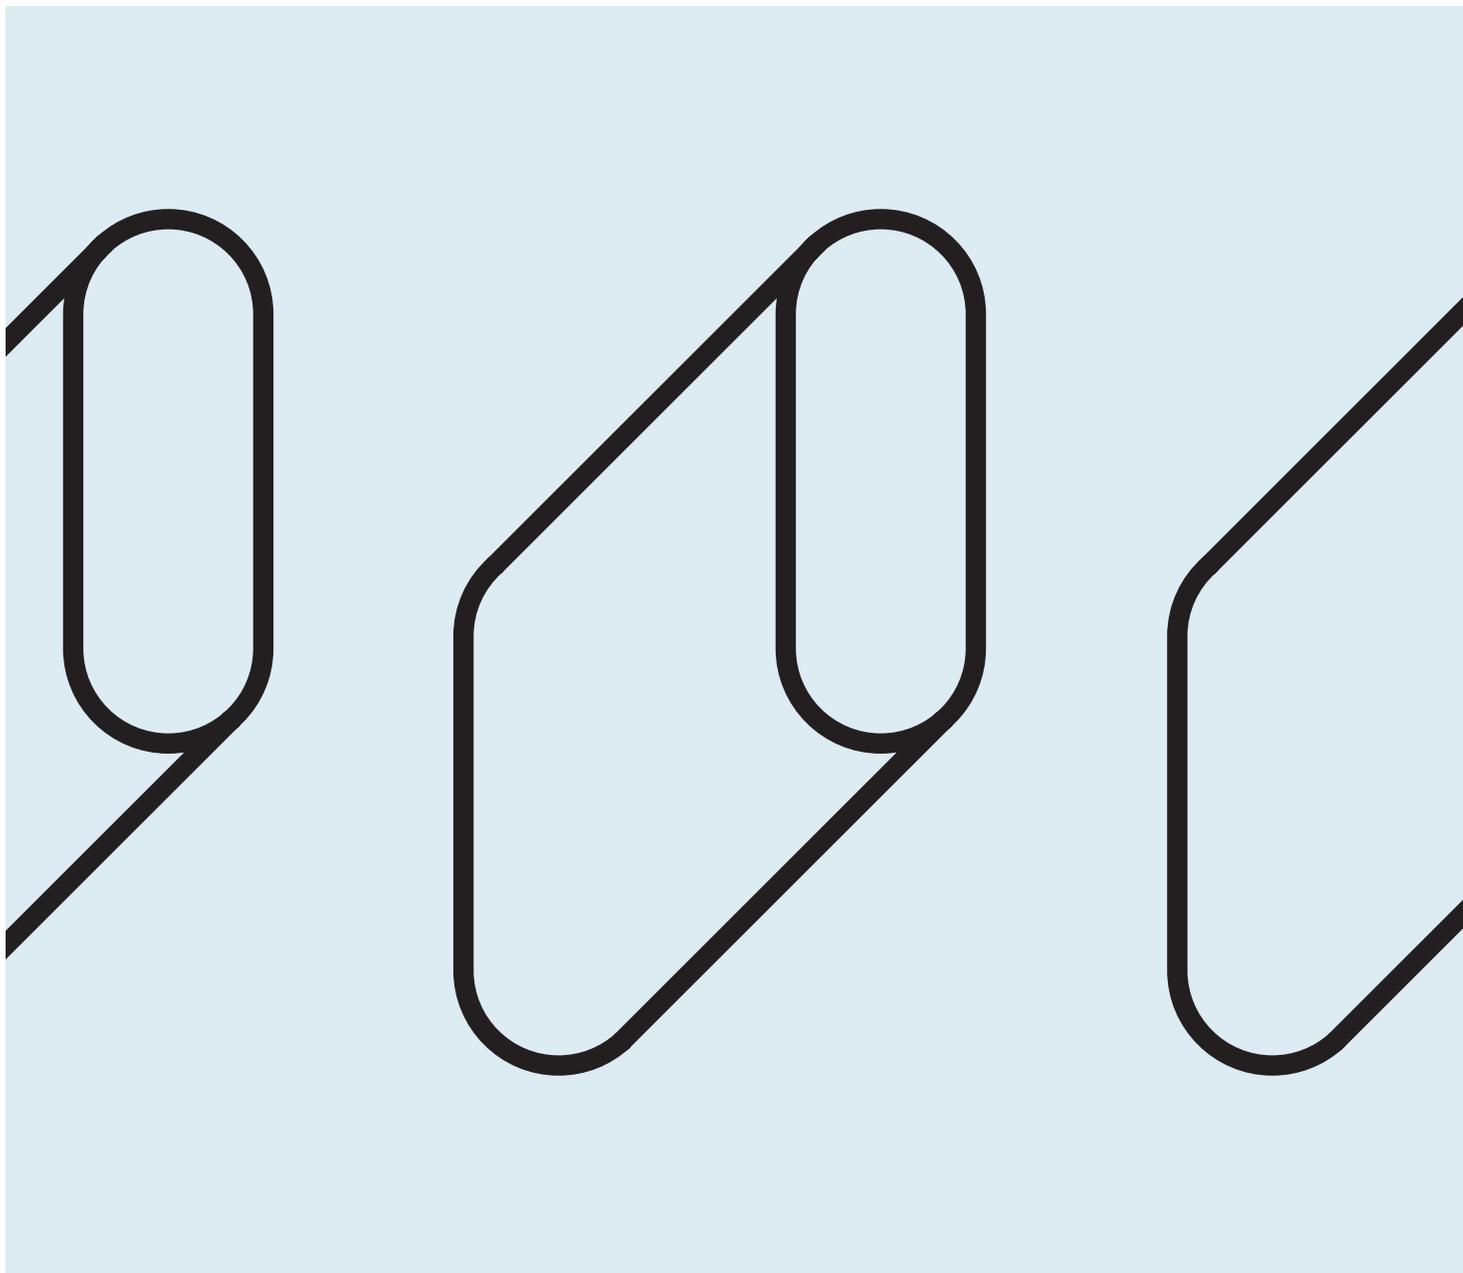

NEED A HAND?

Contact us at service@bludot.com or **844.425.8368** for assistance.


@BLUDOT

We design all our pieces in our Minneapolis studio. Follow along on Instagram for some sneak peeks into the process.


Parts & Hardware




QTY 1
Pt. 9004



QTY 1
Pt. 1042



QTY 1
Wall Bracket

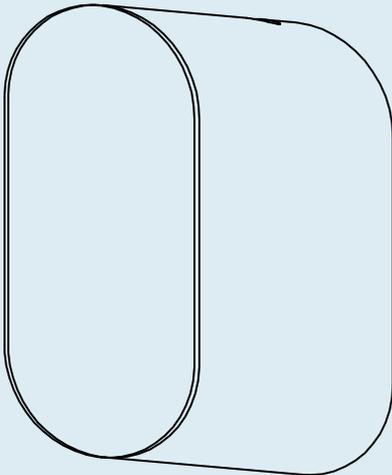

QTY 1
Peg Hook


Step 01

ATTACH WALL BRACKET TO WALL

To determine the hardware best suited for your type of wall, consult your local hardware professional.

Install wall bracket using recommended hardware.



Note: Ensure that the wall bracket is oriented vertically

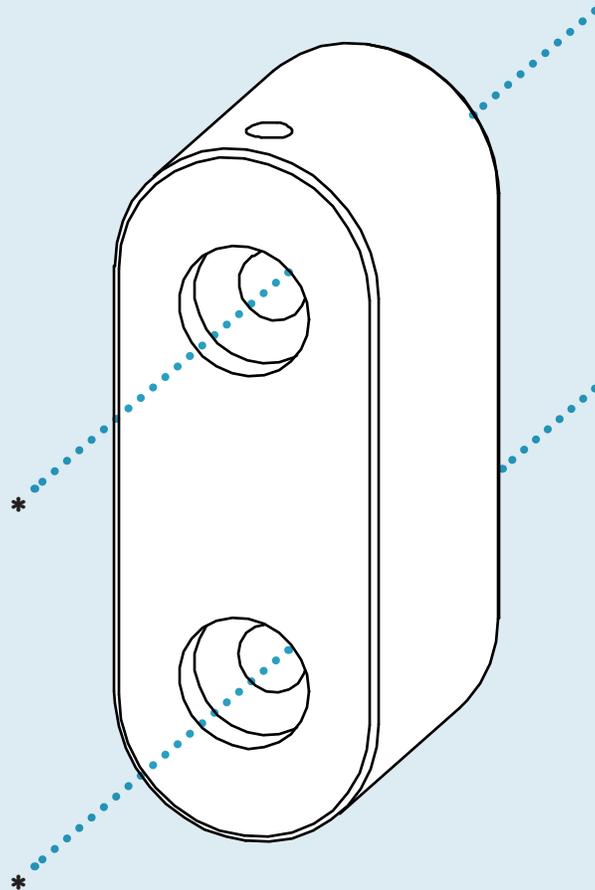

Step 02

SECURE HOOK TO WALL BRACKET

Place peg hook over wall bracket.
Then secure the hook in place with
the provided bolt. Tighten firmly, but
do not over-tighten.

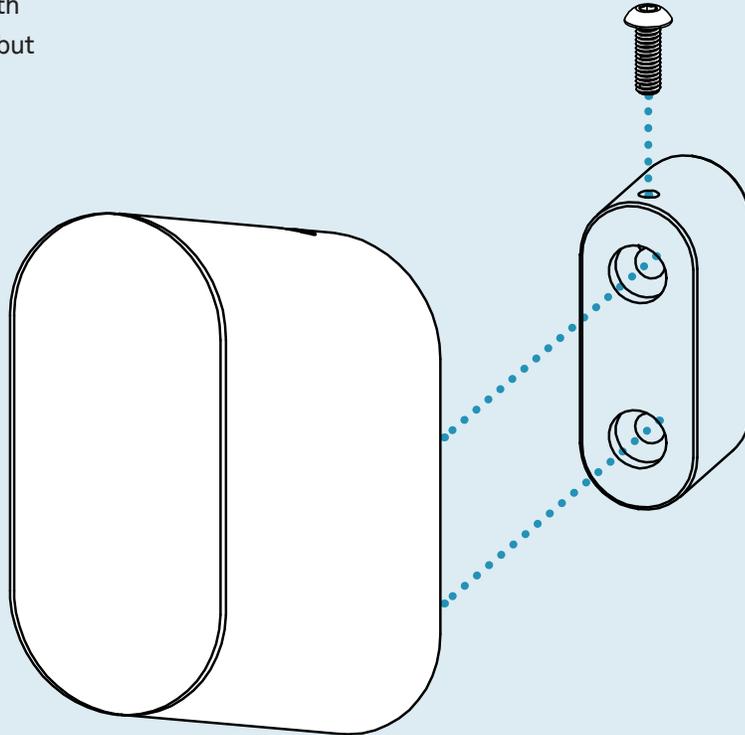

Pt. 1042 x 1



Pt. 9004 x 1

Additional Information

CLEAN

Clean with a slightly damp, soft cloth. To remove dirt and fingerprints, use a quality cleaner formulated for wood furniture. Wipe completely dry with a soft cloth in the direction of the wood grain.

